



Series X55X Universal Zero Insertion Force DIP Test Socket

FEATURES:


- Aries' Universal Test Socket accepts devices on .300 to .600 [7.62 to 15.24] centers.
- All pin count sockets go into PCB with either .300 or .600 [7.62 to 15.24] centers.
- Contacts are normally closed to eliminate dependence on plastic to sustain contact.
- Socket handle can be configured with closed contacts (on) when in the UP or DOWN position, and can be mounted on either the right or left side.
- Sockets can be soldered into PCBs or plugged into any socket. Socket fits into Aries' or any competitive test socket receptacle.

SPECIFICATIONS:

- Socket body is black UL 94V-0 Glass-filled Polyphenylene Sulfide (PPS).
- Handle is Stainless Steel.
- Handle knob is Brass Alloy 360, 1/2 hard.
- Contacts are Beryllium Copper Alloy 172 per QQ-C-533 or Spinodal Alloy.
- Beryllium Copper contact plating is either 200 μ [5.08 μ m] min. 90/10 Tin/Lead per MIL-T-10727 or 10 μ [.25 μ m] min. Gold per MIL-G-45204 over 50 μ [1.27 μ m] min. Nickel per QQ-N-290.
- Spinodal contact plating is 50 μ [1.27 μ m] Nickel Boron.
- Contact current rating=1 Amp.
- Insulation resistance=1000 MOhms min.
- Dielectric withstanding voltage=1000 VAC.
- Life cycle: 25,000 to 50,000 cycles.
- Operating temp.: 221°F [105°C] Tin plating, 302°F [150°C] Gold plating, 392°F [200°C] Nickel Boron plating.
- Retention Force (when closed)=55 grams/pin based on a .020 [.51] diameter test lead.
- Accepts leads .015-.045 [.38-1.14] wide, .110-.280 [2.79-7.11] long.

MOUNTING CONSIDERATIONS:

- See socket footprint below.

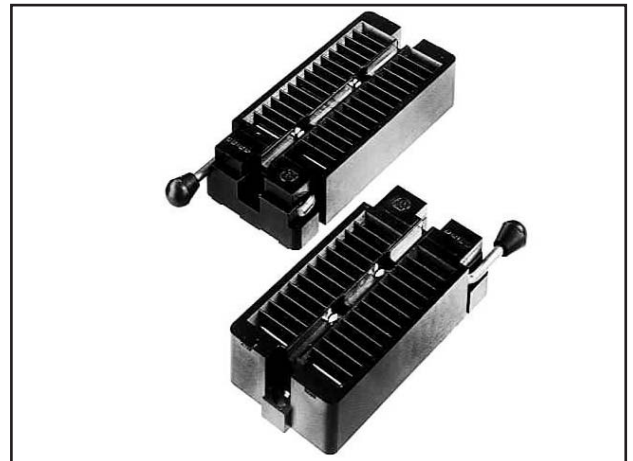

Note: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

XX - X55X - 1X



- No. of pins: 24, 28, 32, 36, 40, 42, 44, 48
- Row-to-row spacing (bottom): 3=.300 [7.62] 6=.600 [15.24] (std.)
- Plating: 0=Tin over Nickel 1=Gold over Nickel 6=Nickel Boron Plated Spinodal
- Solder tail pin
- Handle options: 1=Left, up is on 2=Right, up is on 3=Left, down is on 4=Right, down is on (std.) Note: On=closed contacts

Socket fits Aries' Test Socket Receptacle XX-6556-XX or similar competitors' models. Consult Data Sheet No. 10003.

ALL DIMENSIONS: INCHES [MILLIMETERS]

All tolerances $\pm .005$ [.13] unless otherwise specified

"A"=(NO. OF PINS PER ROW X .100 [2.54]) + .590 [14.99]
 "B"=(NO. OF PINS PER ROW - 1) X .100 [2.54]
 "C"=(NO. OF PINS PER ROW X .100 [2.54]) + .415 [10.54]

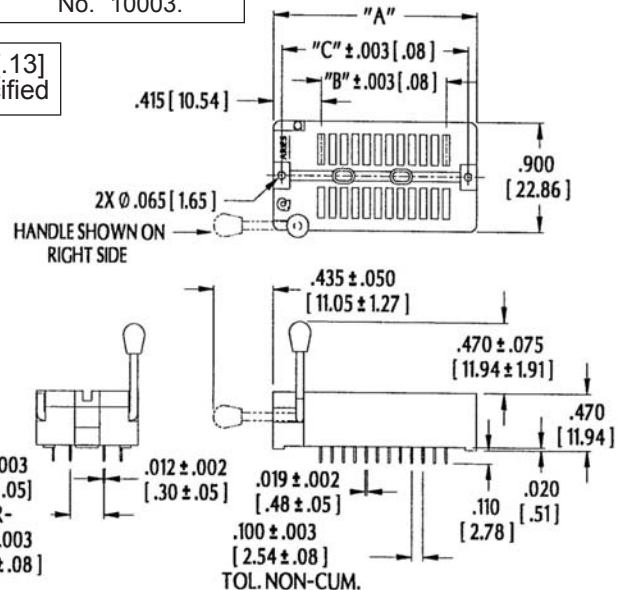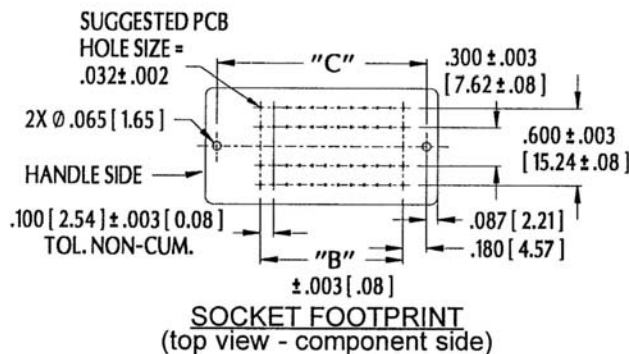

ARIES
ELECTRONICS, INC.

http://www.arieselec.com • information@arieselec.com

NORTH AMERICA
 Frenchtown, NJ USA
 TEL: (908) 996-6841
 FAX: (908) 996-3891



UK/IRELAND/GB
 TEL: +44 870 240 0249
 FAX: +44 1653 600493
 uking@arieselec.com

EUROPE/MAINLAND/HOLLAND
 TEL: +31 78 615 94 65
 FAX: +31 78 615 43 11
 europe@arieselec.com

10001
REV.C